


B 52006

AMTEC® screws

Flanged button head | cross-slot pozidriv

Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

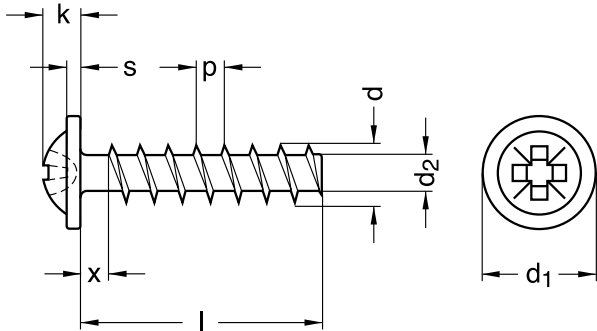

| Diameter (d) | d ₁ | | d ₂ | | k nominal size | s nominal size | Pitch (P) | t | | x max. | Tool size |
|-----------------|----------------|--------------|----------------|------|-------------------|-------------------|--------------|------|------|-----------|--------------|
| | nominal size | nominal size | min. | max. | | | | max. | min. | | |
| 3 | 6 | 2 | 1.9 | 2.1 | 2.1 | 0.7 | 1.35 | 1.51 | 1.26 | 2.8 | Z1 |
| 3.5 | 7 | 2.2 | 2.1 | 2.3 | 2.4 | 0.8 | 1.60 | 1.54 | 1.08 | 3.2 | Z2 |
| 4 | 8 | 2.4 | 2.3 | 2.5 | 2.5 | 0.9 | 1.80 | 1.86 | 1.40 | 3.6 | Z2 |

| nominal size | Length (l) | |
|--------------|------------|-------|
| | min. | max. |
| 6 | 5.40 | 6.60 |
| 8 | 7.25 | 8.75 |
| 10 | 9.25 | 10.75 |
| 16 | 15.10 | 16.90 |

| Diameter (d) | Length (l) | | | |
|-----------------|------------|---|----|----|
| | 6 | 8 | 10 | 16 |
| 3 | ● | ● | ● | |
| 3.5 | | | ● | |
| 4 | | ● | ● | |

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

