


DIN 125 A ähnlich ISO 7089/7090

Scheiben

Form A : ohne Fase

Edelstahl A4 | Cr(VI) - frei

Hinweis: DIN-Norm wurde zurückgezogen

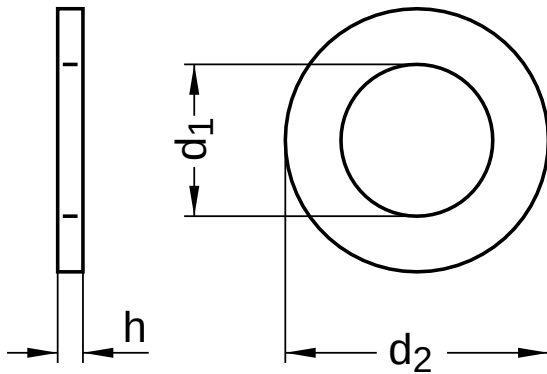

Durchmesser (d)	d ₁		d ₂		Nennmaß	h	
	min.	max.	min.	max.		min.	max.
1,7	1,7	1,84	3,70	4,0	0,3	0,25	0,35
1,8	1,8	1,94	4,20	4,5	0,3	0,25	0,35
2,2	2,2	2,34	4,70	5,0	0,3	0,25	0,35
2,5	2,5	2,64	5,70	6,0	0,5	0,45	0,55
2,7	2,7	2,84	5,70	6,0	0,5	0,45	0,55
3,2	3,2	3,38	6,64	7,0	0,5	0,45	0,55
3,7	3,7	3,88	7,64	8,0	0,5	0,45	0,55
4,3	4,3	4,48	8,64	9,0	0,8	0,70	0,90
5,3	5,3	5,48	9,64	10,0	1,0	0,90	1,10
6,4	6,4	6,62	11,57	12,0	1,6	1,40	1,80
7,4	7,4	7,62	13,57	14,0	1,6	1,40	1,80
8,4	8,4	8,62	15,57	16,0	1,6	1,40	1,80
10,5	10,5	10,77	19,48	20,0	2,0	1,80	2,20
13	13,0	13,27	23,48	24,0	2,5	2,30	2,70
15	15,0	15,27	27,48	28,0	2,5	2,30	2,70
17	17,0	17,27	29,48	30,0	3,0	2,70	3,30
19	19,0	19,33	33,38	34,0	3,0	2,70	3,30
21	21,0	21,33	36,38	37,0	3,0	2,70	3,30
23	23,0	23,33	38,38	39,0	3,0	2,70	3,30
25	25,0	25,33	43,38	44,0	4,0	3,70	4,30
28	28,0	28,33	49,38	50,0	4,0	3,70	4,30
31	31,0	31,39	55,26	56,0	4,0	3,70	4,30
34	34,0	34,62	58,80	60,0	5,0	4,40	5,60
37	37,0	37,62	64,80	66,0	5,0	4,40	5,60
40	40,0	40,62	70,80	72,0	6,0	5,40	6,60
43	43,0	43,62	76,80	78,0	7,0	6,00	8,00
46	46,0	46,62	83,60	85,0	7,0	6,00	8,00
50	50,0	50,62	90,60	92,0	8,0	7,00	9,00

Alle technischen Daten beziehen sich auf das Maß mm

