


DIN 431
Rohrmuttern

Form B

Stahl 14 H | blank | Cr(VI) - frei | Rohrgewinde

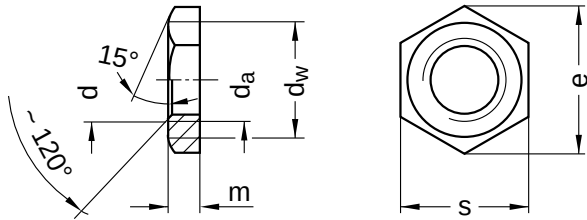

Durchmesser (d)	da	dw	e	m		s		Werkzeuggröße
	max.	min.	min.	min.	max.	min.	max.	
G 1/8	10,5	16,5	19,85	6	6,48	17,57	18	SW 18
G 1/4	14,2	19,1	22,78	6	6,48	20,16	21	SW 21
G 3/8	18,0	24,8	29,56	7	7,58	26,16	27	SW 27
G 1/2	22,6	31,3	37,29	8	8,58	33,00	34	SW 34
G 5/8	24,7	31,3	37,29	8	8,58	33,00	34	SW 34
G 3/4	28,6	32,3	39,55	9	9,58	35,00	36	SW 36
G 1	35,6	42,8	50,85	10	10,58	45,00	46	SW 46
G 1 1/8	40,9	46,5	55,37	10	10,58	49,00	50	SW 50
G 1 1/4	45,3	51,1	60,79	11	11,70	53,80	55	SW 55
G 1 1/2	51,6	55,9	66,44	12	12,70	58,80	60	SW 60
G 1 3/4	58,0	64,7	76,93	13	13,70	68,10	70	SW 70
G 2	64,4	69,4	82,60	13	13,70	73,10	75	SW 75

Alle technischen Daten beziehen sich auf das Maß mm

