


**DIN 439** similar to ISO 4035

## Hexagon nuts

Low version | Form B: with chamfer

Stainless steel A4 | Cr(VI)-free | Metric fine thread

Further information: DIN-standard has been withdrawn | different spanner widths for M10, M12, M14 and M22 | only the regular thread is included in ISO 4035 | the fine thread was transferred to ISO 8675

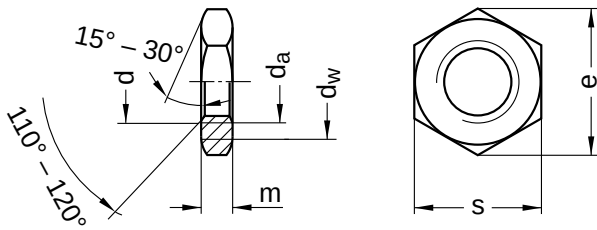

Diameter (d)	d <sub>a</sub>		d <sub>w</sub>	e	m		s		Pitch (P)	Tool size
	min.	max.			min.	max.	min.	max.		
M8 x 0.75	8	8.75	11.6	14.38	3.70	4.0	12.73	13	0.75	SW 13
M8 x 1	8	8.75	11.6	14.38	3.70	4.0	12.73	13	1.00	SW 13
M10 x 1	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.00	SW 17
M10 x 1.25	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.25	SW 17
M12 x 1.25	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.25	SW 19
M12 x 1.5	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.50	SW 19
M14 x 1.5	14	15.10	20.5	24.49	6.42	7.0	21.67	22	1.50	SW 22
M16 x 1.5	16	17.30	22.5	26.75	7.42	8.0	23.67	24	1.50	SW 24
M18 x 1.5	18	19.50	24.9	29.56	8.42	9.0	26.16	27	1.50	SW 27
M20 x 1.5	20	21.60	27.7	32.95	9.10	10.0	29.16	30	1.50	SW 30
M20 x 2	20	21.60	27.7	32.95	9.10	10.0	29.16	30	2.00	SW 30
M22 x 1.5	22	23.80	29.5	35.03	9.90	11.0	31.00	32	1.50	SW 32
M22 x 2	22	23.80	29.5	35.03	9.90	11.0	31.00	32	2.00	SW 32
M24 x 1.5	24	25.90	33.2	39.55	10.90	12.0	35.00	36	1.50	SW 36
M24 x 2	24	25.90	33.2	39.55	10.90	12.0	35.00	36	2.00	SW 36
M27 x 1.5	27	29.20	38.0	45.20	12.40	13.5	40.00	41	1.50	SW 41
M27 x 2	27	29.20	38.0	45.20	12.40	13.5	40.00	41	2.00	SW 41
M30 x 1.5	30	32.40	42.7	50.85	13.90	15.0	45.00	46	1.50	SW 46

All technical data refer to the measure mm

