


DIN 835
Stiftschrauben

Einschraubende $\approx 2 d$

Stahl 5.8 | blank | Cr(VI) - frei | Metrisches Gewinde

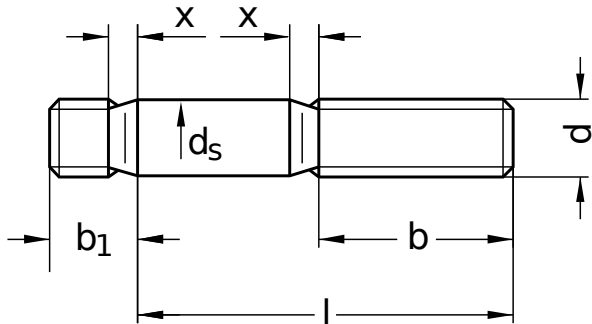

Durchmesser (d)	b			b ₁ Nennmaß	d _s		Steigung (P)	x
	l bis 125	l bis 200	l über 200		min.	max.		
M6	18	24	–	12	5,82	6	1,00	2,5
M8	22	28	–	16	7,78	8	1,25	3,2
M10	26	32	45	20	9,78	10	1,50	3,8
M12	30	36	49	24	11,73	12	1,75	4,3
M16	38	44	57	32	15,73	16	2,00	5,0

Nennmaß	Länge (l)	
	min.	max.
25	24,58	25,42
28	27,58	28,42
30	29,58	30,42
35	34,50	35,50
40	39,50	40,50
45	44,50	45,50
50	49,50	50,50
55	54,40	55,60
60	59,40	60,60
65	64,40	65,60

Nennmaß	Länge (l)	
	min.	max.
70	69,40	70,60
75	74,40	75,60
80	79,40	80,60
85	84,30	85,70
90	89,30	90,70
95	94,30	95,70
100	99,30	100,70

Durchmesser (d)	Länge (l)																
	25	28	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
M6	●	●	●	●		●	●	●	●		●						●
M8			●	●	●	●	●		●	●	●	●	●				
M10				●	●	●	●	●	●	●	●	●		●		●	●
M12						●	●	●	●	●		●	●	●	●	●	●
M16	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

