


DIN 906
Verschlussschrauben

Innensechskant

Edelstahl A2 | Cr(VI) - frei | Metrisches kegeliges Feingewinde

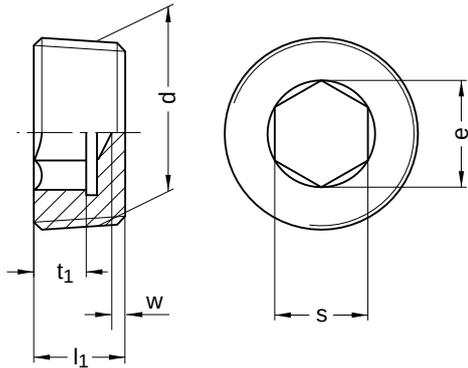

| Durchmesser (d) | l ₁ | e min. | s Nennmaß | Steigung (P) | t ₁ min. | w min. | Werkzeuggröße |
|--------------------|----------------|-----------|--------------|-----------------|------------------------|-----------|---------------|
| M8 x 1 | 8 | 4,6 | 4 | 1,0 | 4 | 1,8 | SW 4 |
| M10 x 1 | 8 | 5,7 | 5 | 1,0 | 4 | 1,8 | SW 5 |
| M12 x 1,5 | 10 | 6,9 | 6 | 1,5 | 5 | 2,0 | SW 6 |
| M14 x 1,5 | 10 | 8,0 | 7 | 1,5 | 5 | 2,0 | SW 7 |
| M16 x 1,5 | 10 | 9,2 | 8 | 1,5 | 5 | 2,0 | SW 8 |
| M18 x 1,5 | 10 | 9,2 | 8 | 1,5 | 5 | 2,0 | SW 8 |
| M22 x 1,5 | 10 | 11,4 | 10 | 1,5 | 5 | 2,0 | SW 10 |
| M24 x 1,5 | 12 | 13,7 | 12 | 1,5 | 6 | 2,0 | SW 12 |
| M26 x 1,5 | 12 | 13,7 | 12 | 1,5 | 6 | 2,0 | SW 12 |
| M27 x 2 | 12 | 13,7 | 12 | 2,0 | 6 | 2,0 | SW 12 |
| M30 x 1,5 | 12 | 19,4 | 17 | 1,5 | 6 | 2,0 | SW 17 |
| M30 x 2 | 12 | 19,4 | 17 | 2,0 | 6 | 2,0 | SW 17 |

Alle technischen Daten beziehen sich auf das Maß mm

