

DIN 939

Stiftschrauben


Einschraubende $\approx 1,25 d$

Edelstahl A4 | Cr(VI) - frei | Metrisches Gewinde



Einschraubende

Mutterende

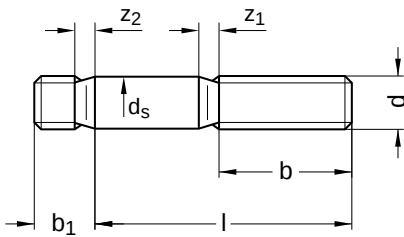

Durchmesser (d)	b			b ₁ Nennmaß	Steigung (P)	z ₂	z ₁
	l bis 125	l bis 200	l über 200				
M5	16	22	–	6,5	0,80	1,00	2
M6	18	24	–	7,5	1,00	1,25	2,5
M8	22	28	–	10,0	1,25	1,60	3,2
M10	26	32	45	12,0	1,50	1,90	3,8
M12	30	36	49	15,0	1,75	2,20	4,3
M16	38	44	57	20,0	2,00	2,50	5
M20	46	52	65	25,0	2,50	3,20	6,3
M24	54	60	73	30,0	3,00	3,80	7,5
M27	60	66	79	35,0	3,00	3,80	7,5
M30	66	72	85	38,0	3,50	4,50	9

Nennmaß	Länge (l)	
	min.	max.
20	19,58	20,42
25	24,58	25,42
30	29,58	30,42
35	34,50	35,50
40	39,50	40,50
45	44,50	45,50
50	49,50	50,50
55	54,40	55,60
60	59,40	60,60
65	64,40	65,60

Nennmaß	Länge (l)	
	min.	max.
70	69,40	70,60
75	74,40	75,60
80	79,40	80,60
85	84,30	85,70
90	89,30	90,70
95	94,30	95,70
100	99,30	100,70
110	109,30	110,70
120	119,30	120,70

Alle technischen Daten beziehen sich auf das Maß mm



DIN 939

Stiftschrauben

Einschraubende ≈ 1,25 d

Edelstahl A4 | Cr(VI) - frei | Metrisches Gewinde

Durchmesser (d)	Länge (l)																			
	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	110	120	
M5		●	●	●	●	●	●													
M6	●	●	●	●	●	●	●	●												
M8		●		●	●	●	●	●	●			●	●							
M10		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
M12				●	●	●	●	●	●		●	●	●	●	●	●		●	●	
M16			●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
M20									●	●	●		●	●	●	●	●	●	●	
M24											●	●	●	●	●	●	●	●	●	
M27													●		●		●	●	●	
M30																	●	●	●	

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

