


**DIN 963** ähnlich ISO 2009

# Senkschrauben

mit Schlitz | Form A

Stahl 4.8 | blank | Cr(VI) - frei | Metrisches Gewinde

Hinweis: DIN-Norm wurde zurückgezogen

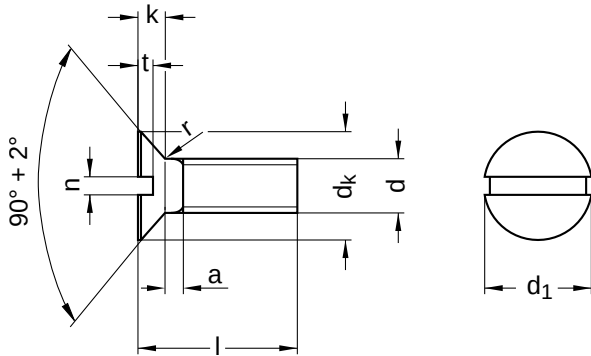

Durchmesser (d)	a max.	dk		k max.	Nennmaß	n		r max.	Steigung (P)	t	
		min.	max.			min.	max.			max.	min.
M3	1,0	5,30	5,6	1,65	0,8	0,86	1,00	0,30	0,50	0,85	0,6
M3,5	1,2	6,14	6,5	1,93	0,8	0,86	1,00	0,35	0,60	1,00	0,7
M4	1,4	7,14	7,5	2,20	1,0	1,06	1,20	0,40	0,70	1,10	0,8
M5	1,6	8,84	92,0	2,50	1,2	1,26	1,51	0,50	0,80	1,30	1,0
M6	2,0	10,57	11,0	3,00	1,6	1,66	1,91	0,60	1,00	1,60	1,2
M8	2,5	14,07	14,5	4,00	2,0	2,06	2,31	0,80	1,25	2,10	1,6
M10	3,0	17,57	18,0	5,00	2,5	2,56	2,81	1,00	1,50	2,60	2,0
M12	3,5	21,48	22,0	6,00	3,0	3,06	3,31	1,20	1,75	3,00	2,4
M16	4,0	28,48	29,0	8,00	4,0	4,07	4,37	1,60	2,00	4,00	3,2
M20	5,0	35,38	36,0	10,00	5,0	5,07	5,37	2,00	2,50	5,00	4,0

Nennmaß	Länge (l)	
	min.	max.
5	4,76	5,24
6	5,76	6,24
8	7,70	8,30
10	9,70	10,30
12	11,65	12,35
14	13,65	14,35
16	15,65	16,35
18	17,65	18,35
20	19,60	20,40
22	21,60	22,40
25	24,60	25,40
30	29,60	30,40

Nennmaß	Länge (l)	
	min.	max.
35	34,50	35,50
40	39,50	40,50
45	44,50	45,50
50	49,50	50,50
60	59,40	60,60
70	69,40	70,60
80	79,40	80,60
90	89,30	90,70
100	99,30	100,70

Alle technischen Daten beziehen sich auf das Maß mm



**DIN 963** ähnlich ISO 2009

# Senkschrauben

mit Schlitz | Form A

Stahl 4.8 | blank | Cr(VI) - frei | Metrisches Gewinde

Durchmesser (d)	Länge (l)																				
	5	6	8	10	12	14	16	18	20	22	25	30	35	40	45	50	60	70	80	90	100
M3	●		●	●		●	●	●	●	●	●	●	●	●	●						
M3,5				●	●		●		●		●	●									
M4	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
M5			●	●		●	●	●		●	●	●	●	●	●	●	●				
M6			●	●	●	●	●	●	●	●	●	●	●	●	●	●					
M8				●	●	●	●	●	●	●	●	●	●	●	●	●					
M10							●	●	●	●	●	●	●	●	●	●	●				
M12									●		●	●	●	●	●	●	●	●	●	●	●
M16											●	●	●	●	●	●	●	●	●	●	●
M20															●	●	●		●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

