


**ISO 8750**  
**Spiral-Spannstifte**

Regelausführung

Federstahl | blank | Cr(VI) - frei

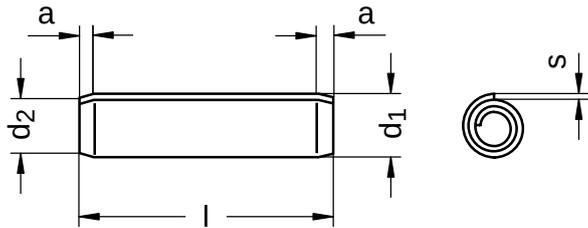

Durchmesser (d)	a	Nennmaß	d <sub>1</sub>		d <sub>2</sub> max.	s Nennmaß
			min.	max.		
2	0,7	2	2,13	2,25	1,90	1,9
3	0,9	3	3,15	3,30	2,90	4,2
4	1,1	4	4,20	4,40	3,90	7,6
5	1,3	5	5,25	5,50	4,85	11,5
6	1,5	6	6,25	6,50	5,85	16,8
8	2,0	8	8,30	8,63	7,80	30,0
10	2,5	10	10,35	10,80	9,75	48,0
12	3,0	12	12,40	12,85	11,70	67,0
14	3,5	14	14,45	14,95	13,60	-
16	4,0	16	16,45	17,00	15,60	-

Alle technischen Daten beziehen sich auf das Maß mm



