

# RIVQUICK® Standard rivets

## Dome head

Note: stainless steel A4 body and stainless steel A4 mandrel

Technical information can be found on the last page.




Diameter (d)	Article number	d <sub>1</sub> nominal size	d <sub>2</sub> nominal size	Drilling diameter d nominal size	e	
					min.	max.
3.2	22138132060	3.2	6.5	3.3 - 3.4	0.5	3.0
	22138132100		6.5	3.3 - 3.4	4.0	6.0
4	22038140080	4	8.4	4.1	2.5	4.5
	22038140100		8.4	4.1	4.5	6.5
	22138140120		8	4.1 - 4.2	6.5	8.0
	22138140140		8	4.1 - 4.2	7.0	9.5
4.8	22138148080	4.8	9.5	4.9 - 5.0	2.5	4.0
	22138148100		9.5	4.9 - 5.0	4.0	6.0
	22138148120		9.5	4.9 - 5.0	6.0	8.0
	22138148140		9.5	4.9 - 5.0	7.5	10.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3.2	6	0.9	2200	2600
	10	0.9	2200	2600
4	8	1.7	3100	4000
	10	1.7	3100	4000
	12	1.2	3300	4100
	14	1.2	3300	4100
4.8	8	1.4	4800	6000
	10	1.4	4800	6000
	12	1.4	4800	6000
	14	1.4	4800	6000

All technical data refer to the measure mm



### Symbol list

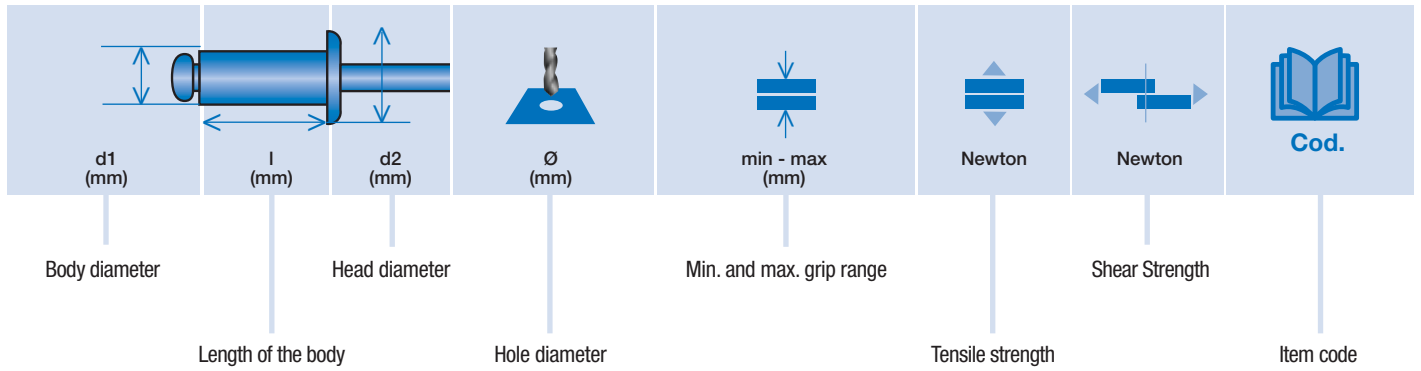

All technical data refer to the measure mm

