

RIVQUICK® Standard rivets

Countersunk head

Note: steel body and steel mandrel

Technical information can be found on the last page.




Diameter (d)	Article number	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e	
					min.	max.
3.2	22132232080	3.2	6	3.3 - 3.4	3.0	5.0
	22132232100		6	3.3 - 3.4	5.0	7.0
	22132232120		6	3.3 - 3.4	7.0	9.0
4	22132240080	4	7.5	4.1 - 4.2	2.5	4.5
	22132240100		7.5	4.1 - 4.2	4.5	6.5
	22132240120		7.5	4.1 - 4.2	6.5	8.5
	22132240140		7.5	4.1 - 4.2	8.5	10.5
4.8	22032248100	4.8	10.1	4.9	4.0	6.0
	22032248120		10.1	4.9	6.0	8.0
	22132248100		9	4.9 - 5.0	4.0	6.0
	22132248120		9	4.9 - 5.0	6.0	8.0
	22132248140		9	4.9 - 5.0	7.0	9.0
	22132248160		9	4.9 - 5.0	7.5	11.0
	22132248200		9	4.9 - 5.0	11.0	15.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3.2	8	1.0	1100	1500
	10	1.0		1500
	12	1.0		1500
4	8	1.2	1800	2500
	10	1.2		2500
	12	1.2		2500
	14	1.2		2500
4.8	10	2.0	2900	3100
	12	2.0		3100
	10	1.3		3700
	12	1.3		3700
	14	1.3		3700
	16	1.3		3700
	20	1.3		3700

All technical data refer to the measure mm



Symbol list

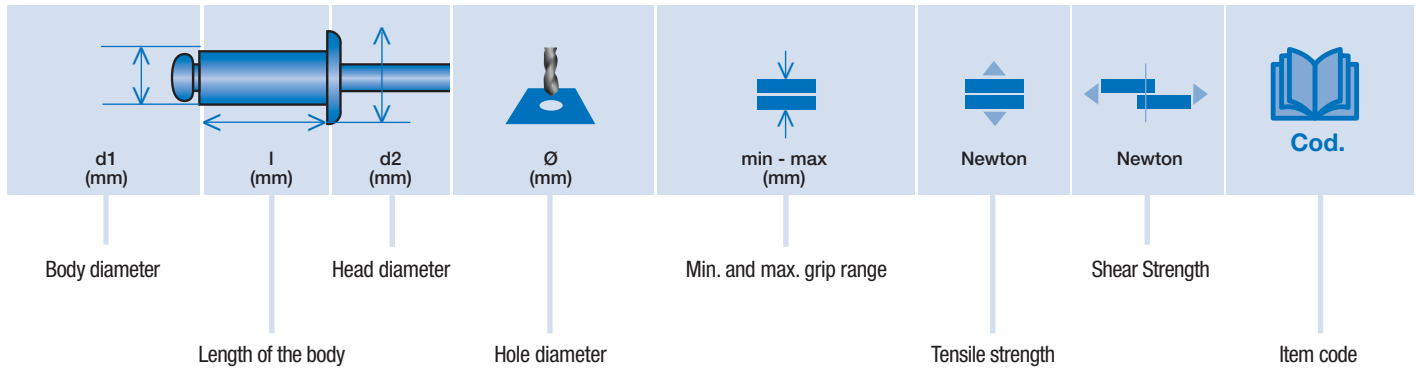

All technical data refer to the measure mm

