
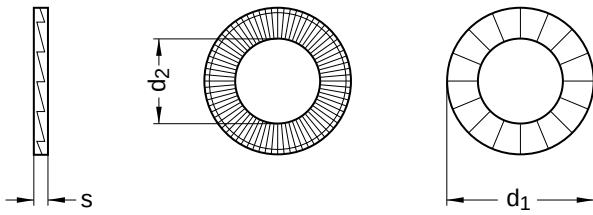


**B 53074**  
**NORD-LOCK® wedge-locking washers**

Standard external diameter

Steel | zinc flake coating | Cr(VI)-free

Further information: Laser marking with lot number | For further information and CAD-files please use the link to NORD-LOCK® homepage: <http://www.solidcomponents.com/?company=SCCAD48YT>



Diameter (d)	d <sub>1</sub>			d <sub>2</sub>			s			Pitch (P)
	nominal size	min.	max.	nominal size	min.	max.	nominal size	min.	max.	
M3	7	6.8	7.2	3.4	3.3	3.5	1.8	1.55	2.05	0.50
M4	7.6	7.4	7.8	4.4	4.3	4.5	1.8	1.55	2.05	0.70
M5	9	8.8	9.2	5.4	5.3	5.5	1.8	1.55	2.05	0.80
M6	10.8	10.6	11.0	6.5	6.4	6.6	1.8	1.55	2.05	1.00
M8	13.5	13.3	13.7	8.7	8.6	8.8	2.5	2.25	2.75	1.25
M10	16.6	16.4	16.8	10.7	10.5	10.9	2.5	2.25	2.75	1.50
M12	19.5	19.3	19.7	13	12.8	13.2	2.5	2.25	2.75	1.75
M14	23	22.8	23.2	15.2	15.0	15.4	3.4	3.15	3.65	2.00
M16	25.4	25.2	25.6	17	16.8	17.2	3.4	3.15	3.65	2.00
M18	29	28.8	29.2	19.5	19.3	19.7	3.4	3.15	3.65	2.50
M20	30.7	30.5	30.9	21.4	21.2	21.6	3.4	3.15	3.65	2.50
M22	34.5	34.3	34.7	23.4	23.2	23.6	3.4	3.15	3.65	2.50
M24	39	38.8	39.2	25.3	25.1	25.5	3.4	3.15	3.65	3.00
M27	42	41.7	42.3	28.4	28.2	28.6	5.8	5.55	6.05	3.00
M30	47	46.7	47.3	31.4	31.2	31.6	5.8	5.55	6.05	3.50
M36	55	54.7	55.3	37.4	37.2	37.6	5.8	5.55	6.05	4.00

All technical data refer to the measure mm

