


**DIN 464**  
**Knurled screws**

High version

Brass | Cr(VI)-free | Metric thread

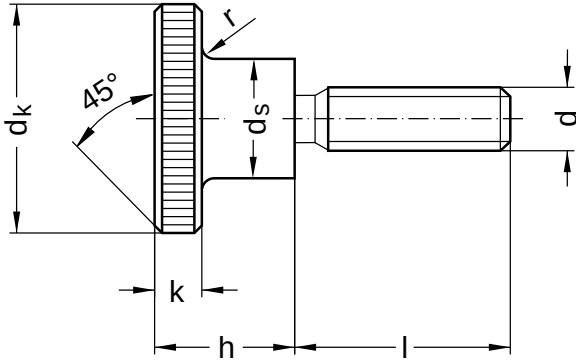

Diameter (d)	nominal size	dk		ds		h			k		r nominal size	Pitch (P)
		min.	max.	min.	max.	nominal size	min.	max.	min.	max.		
M3	12	11.65	12.35	5.70	6	7.5	7.21	7.79	2.25	2.5	0.5	0.50
M4	16	15.65	16.35	7.64	8	9.5	9.21	9.79	3.20	3.5	0.5	0.70
M5	20	19.58	20.42	9.64	10	11.5	11.15	11.85	3.70	4.0	1	0.80
M6	24	23.58	24.42	11.57	12	15.0	14.65	15.35	4.70	5.0	1	1.00
M8	30	29.58	30.42	15.57	16	18.0	17.65	18.35	5.70	6.0	2	1.25

nominal size	Length (l)	
	min.	max.
4	3.9	4.1
5	4.8	5.2
6	5.8	6.2
8	7.8	8.2
10	9.7	10.3
12	11.7	12.3

nominal size	Length (l)	
	min.	max.
16	15.7	16.3
20	19.6	20.4
25	24.6	25.6

Diameter (d)	Length (l)									
	4	5	6	8	10	12	16	20	25	
M3	●	●	●	●		●				
M4		●	●	●	●	●	●			
M5					●	●				
M6					●	●	●	●	●	
M8							●	●	●	

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

