


**DIN 94** ähnlich ISO 1234

# Splinte

Einschraubende  $\approx 1,25 d$

Edelstahl A2 | Cr(VI) - frei

Hinweis: DIN-Norm wurde zurückgezogen

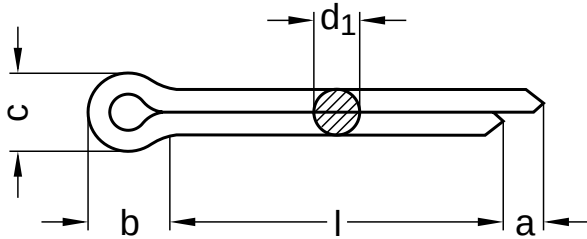

Durchmesser (d)	a		b Nennmaß	c		Nennmaß	d <sub>1</sub>	
	min.	max.		min.	max.		min.	max.
1,6	1,25	2,5	3,2	2,4	2,8	1,6	1,3	1,4
2	1,25	2,5	4,0	3,2	3,6	2	1,7	1,8
2,5	1,25	2,5	5,0	4,0	4,6	2,5	2,1	2,3
3,2	1,60	3,2	6,4	5,1	5,8	3,2	2,7	2,9
4	2,00	4,0	8,0	6,5	7,4	4	3,5	3,7
5	2,00	4,0	10,0	8,0	9,2	5	4,4	4,6
6,3	2,00	4,0	12,6	10,3	11,8	6,3	5,7	5,9
8	2,00	4,0	16,0	13,1	15,0	8	7,3	7,5
10	3,20	6,3	20,0	16,6	19,0	10	9,3	9,5

Nennmaß	Länge (l)	
	min.	max.
8	7,25	8,75
10	9,25	10,75
12	11,10	12,90
14	13,10	14,90
16	15,10	16,90
18	17,10	18,90
20	19,00	21,00
22	21,00	23,00
25	24,00	26,00
28	27,00	29,00
32	30,75	33,25
36	34,75	37,25

Nennmaß	Länge (l)	
	min.	max.
40	38,75	41,25
45	43,75	46,25
50	48,75	51,25
56	54,50	57,50
63	61,50	64,50
71	69,50	72,50
80	78,50	81,50
90	88,25	91,75
100	98,25	101,75

Alle technischen Daten beziehen sich auf das Maß mm



**DIN 94** ähnlich ISO 1234

# Splinte

Einschraubende ≈ 1,25 d

Edelstahl A2 | Cr(VI) - frei

Durchmesser (d)	Länge (l)																					
	8	10	12	14	16	18	20	22	25	28	32	36	40	45	50	56	63	71	80	90	100	
1,6	●	●	●	●	●	●	●	●	●	●	●											
2		●	●	●	●	●	●	●	●	●	●	●	●									
2,5			●	●	●	●	●	●	●	●		●	●	●	●							
3,2					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
4									●	●	●	●	●	●	●	●	●	●	●	●	●	●
5							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
6,3										●	●	●	●	●	●	●	●	●	●	●	●	●
8												●	●									
10													●	●					●	●	●	●

• Kombinationen im eShop erhältlich | Weitere Größen auf Anfrage

Alle technischen Daten beziehen sich auf das Maß mm

