

# RIVQUICK® Coloured blind rivets

Dome head | Colored rivet black RAL9005

Note: aluminium body and steel mandrel

Technical information can be found on the last page.



Diameter (d)	Article number	d <sub>1</sub> nominal size	d <sub>2</sub> nominal size	Drilling diameter d nominal size	e	
					min.	max.
3	22161130063	3	6.5	3.1 - 3.2	1.0	3.0
	22161130083				3.0	5.0
	22161130103				5.0	7.0
3.2	22161132063	3.2	6.5	3.3 - 3.4	1.0	3.0
	22161132083				3.0	5.0
	22161132103				5.0	7.0
	22161132123				7.0	9.0
4	22161140073	4	8	4.1 - 4.2	2.0	3.5
	22161140083				3.0	4.5
	22161140093				4.0	5.5
	22161140103				5.0	6.5
	22161140113				6.0	7.5
	22161140123				7.0	8.5
	22161140143				8.0	10.5
	22161140163				10.0	12.5
4.8	22161148073	4.8	9.5	4.9 - 5.0	1.5	3.0
	22161148083				2.5	4.0
	22161148093				3.5	5.0
	22161148103				4.5	6.0
	22161148113				5.5	7.0
	22161148123				6.5	8.0
	22161148143				7.5	10.0
	22161148163				9.5	12.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3	6	0.9	600	950
	8			
	10			
3.2	6	0.9	750	1000
	7			
	8			
	9			

All technical data refer to the measure mm



# RIVQUICK® Coloured blind rivets


Dome head | Colored rivet black RAL9005

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
4	7	1.2	1200	1750
	8			
	9			
	10			
	11			
	12			
	14			
	16			
4.8	18	1.4	1850	2600
	20			
	7			
	8			
	9			
	10			
	11			
	12			
4.8	14	1.4	1850	2600
	16			

All technical data refer to the measure mm



### Symbol list

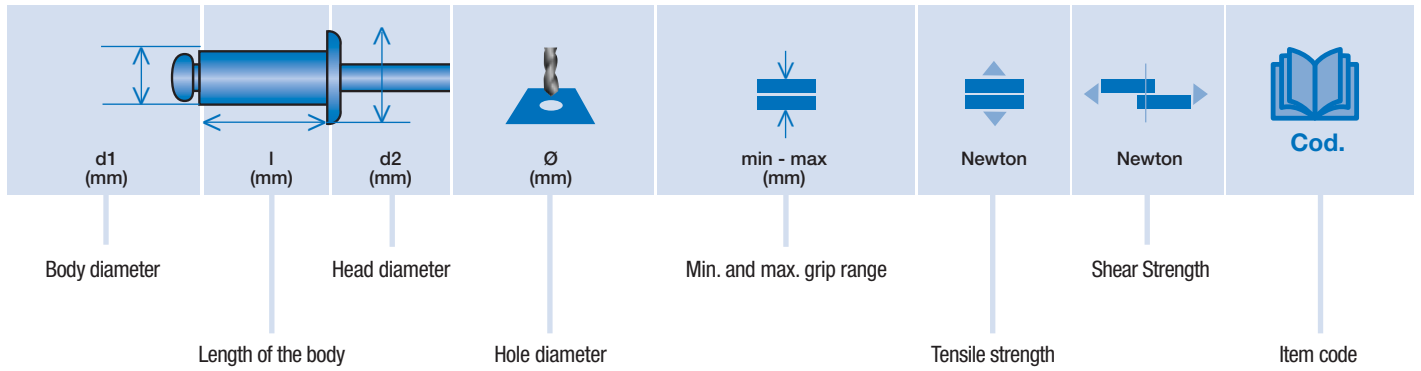

All technical data refer to the measure mm

